

\*NOTE 1\*  
 .21 (5.33)  
 GREEN L.E.D. (POWER)  
 RED L.E.D. (ALARM)  
 (X2) 3/4\"/>

X1 PROCESS FITTING SHOWN



H	11.50 (292.1)	16.25 (412.8)	8.12 (206.2)
G	7.00 (178)	11.75 (298.5)	3.63 (92.2)
F	4.50 (114.5)	10.00 (254)	3.25 (82.6)
E	3.38 (86)	8.50 (216)	2.75 (69.9)
D	10.50 (266.7)	15.25 (387.4)	7.12 (180.8)
C	6.00 (152.5)	10.75 (273)	2.63 (66.8)
B	3.50 (89)	9.00 (228.5)	2.25 (57.2)
A	2.38 (60.5)	7.50 (190.5)	1.75 (44.5)
APPROX DIM'S	STD. & FOODGRADE	H.D.	STUB
PROBE TYPE	0 & 2	5	4

\*NOTE\*  
 1-ONLY UNITS WITH ADVANCED ELECTRONICS WILL HAVE LIGHTS.  
 2-FOR HORIZONTAL MOUNTING, CONDUIT OPENINGS MUST FACE DOWNWARDS AND INCLUDE DRIPLOOP.

DO NOT SCALE. DIMENSIONS ARE IN INCHES. BRACKETED DIMENSIONS ARE IN MILLIMETERS.

A	INIT. RELEASE	13-300	SE	8-13-13
	REVISIONS	ECN #	DRAWN BY	APP'D BY
			DATE	DATE

<b>venture</b> MEASUREMENT 150 VENTURE BLVD. SPARTANBURG, SC 29306	TITLE	OUTLINE DWG FOR VRFII STANDARD CABLE UNIT	SCALE	NONE
	FILE	VRF285002	REF	B
UNSPECIFIED TOLERANCES DECIMALS: XX ±.01 XXX ±.005 ANGLES: ±=1/2" DEBURR & BREAK EDGES .005 ⚡ = CRITICAL DIM. OR NOTE	MATERIAL	-----	PART	VRF285002
	FINISH	-----		SHEET 1 of 2

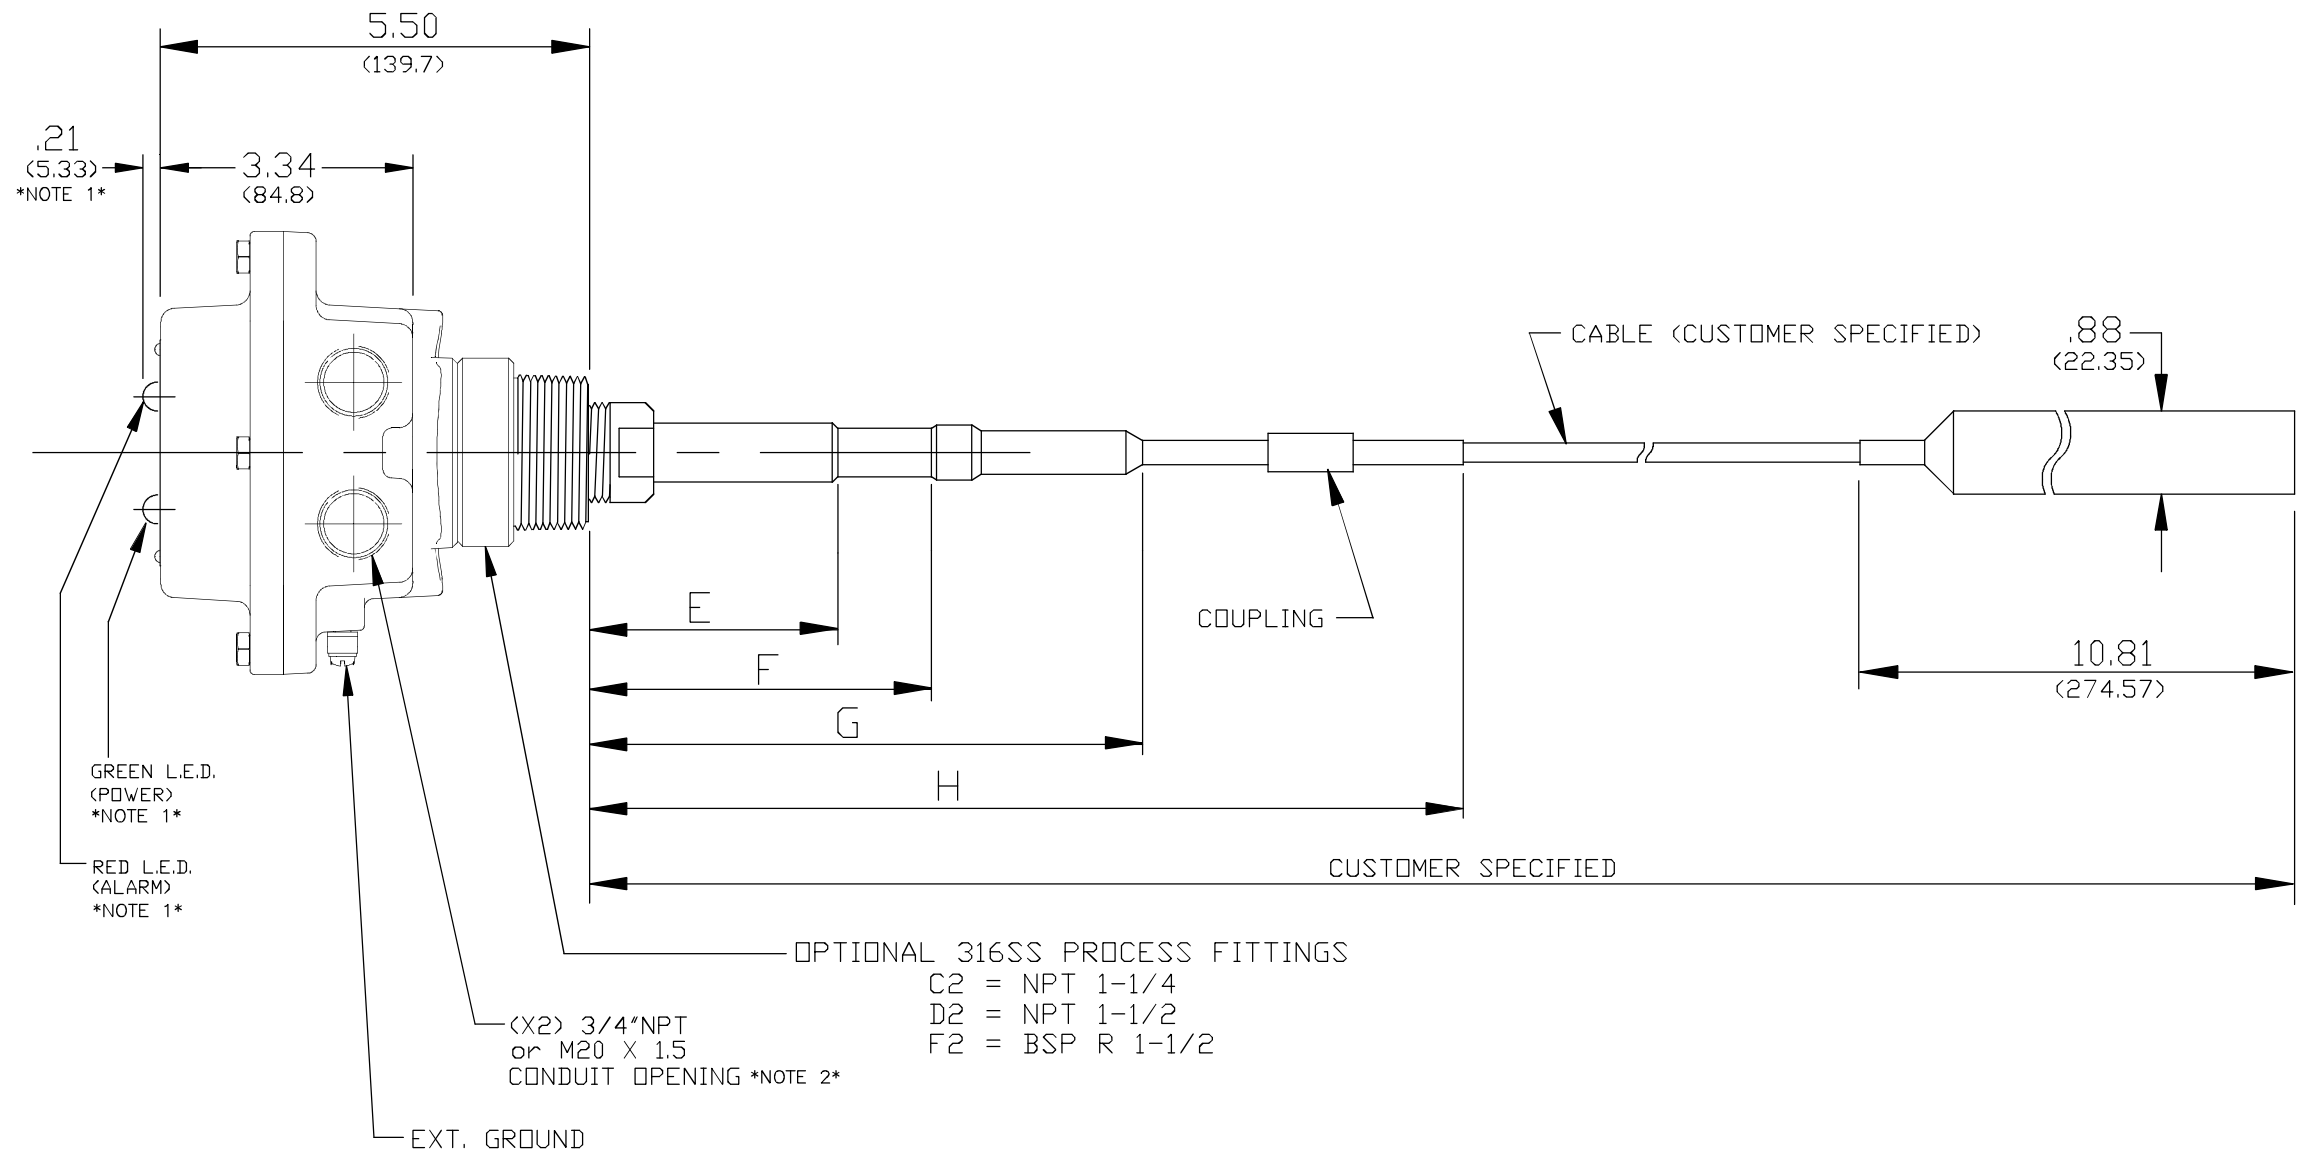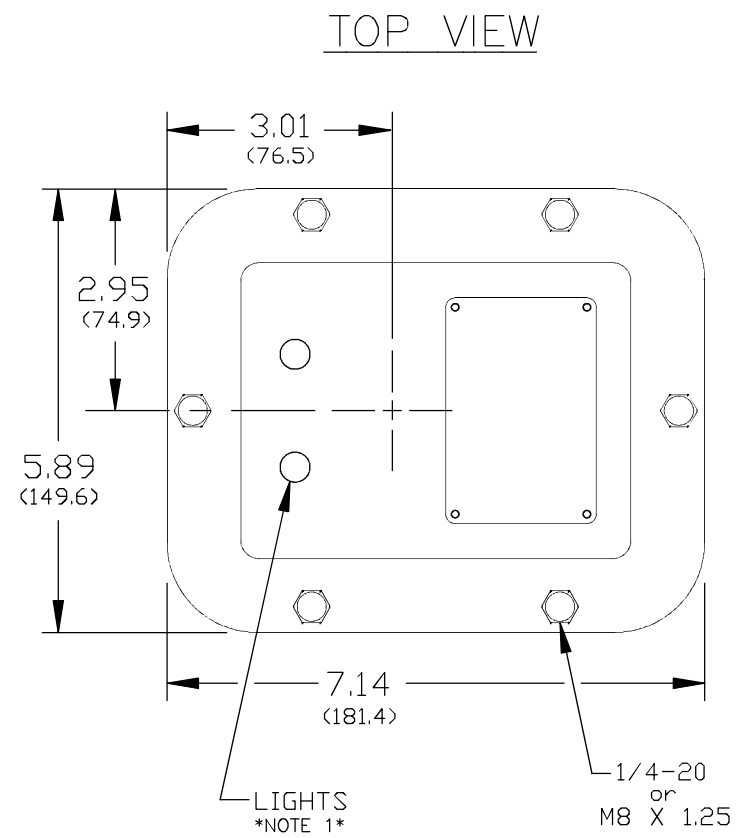

OUTLINE DWG FOR VRFII STANDARD CABLE UNIT  
with C2, D2, & F2  
PROCESS FITTINGS

\*NOTE\*  
 1—ONLY UNITS WITH ADVANCED ELECTRONICS WILL HAVE LIGHTS.  
 2—FOR HORIZONTAL MOUNTING, CONDUIT OPENINGS MUST FACE  
 DOWNWARDS AND INCLUDE DRIPLOOP.

H	11.50 (292.1)	16.25 (412.8)	8.12 (206.2)
G	7.00 (178)	11.75 (298.5)	3.63 (92.2)
F	4.50 (114.5)	10.00 (254)	3.25 (82.6)
E	3.38 (86)	8.50 (216)	2.75 (69.9)
APPROX DIM'S	STD. & FOODGRADE	H.D.	STUB
PROBE TYPE	0 & 2	5	4

DO NOT SCALE. DIMENSIONS ARE IN INCHES.  
 BRACKETED DIMENSIONS ARE IN MILLIMETERS.

PART	SHEET
VRF285002	2 of 2 RevA